GOLF MECHANIX® 130601

Universal Ferrule Turning Arm

Reinforced one piece construction provides a stiff and stable platform when buffing ferrules or polishing heads. ▼

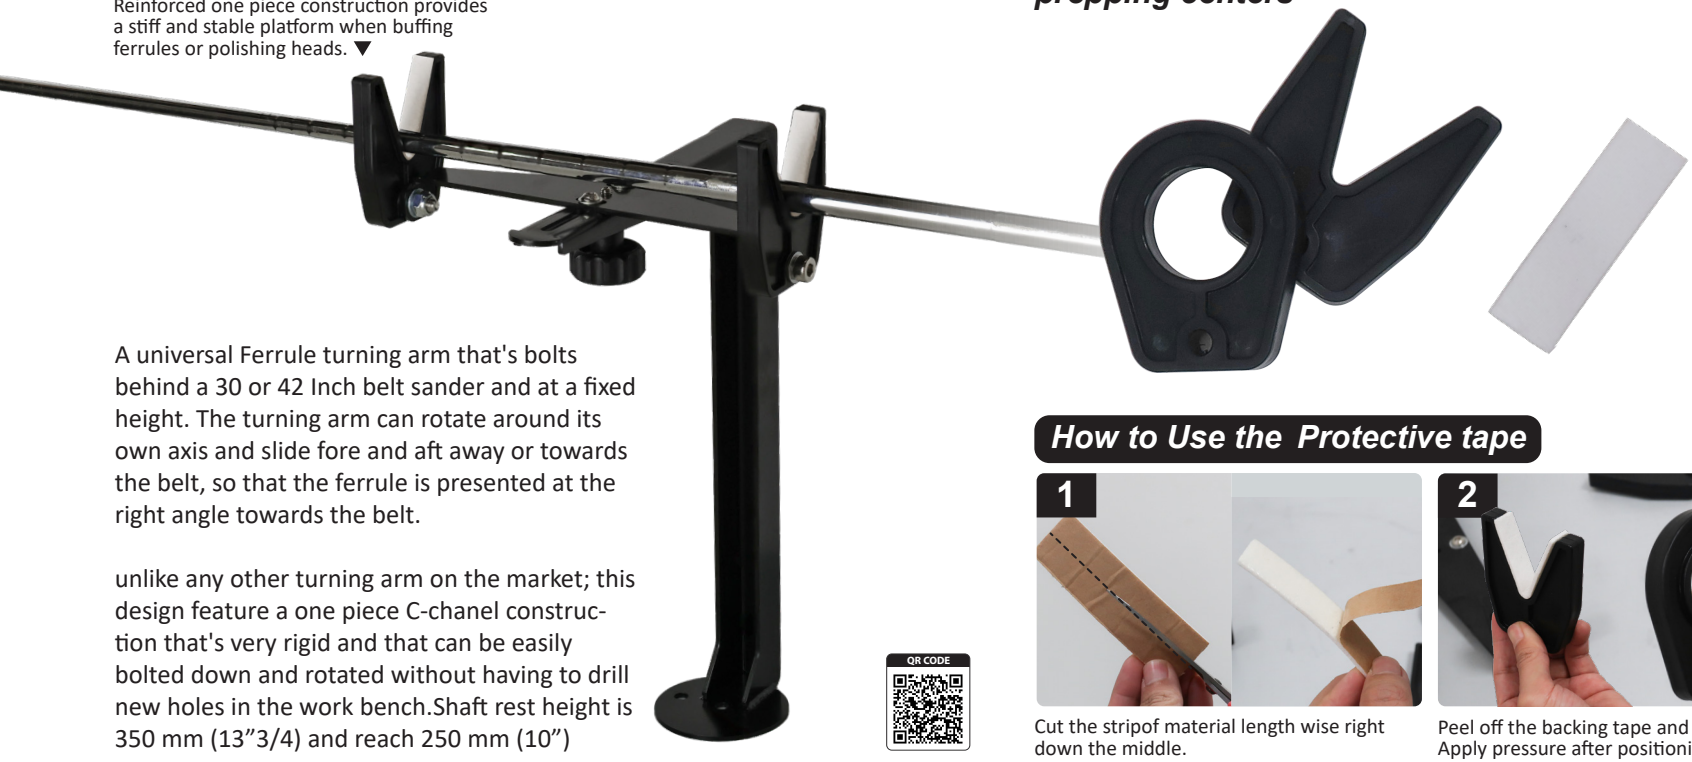

A universal Ferrule turning arm that's bolts behind a 30 or 42 Inch belt sander and at a fixed height. The turning arm can rotate around its own axis and slide fore and aft away or towards the belt, so that the ferrule is presented at the right angle towards the belt.

unlike any other turning arm on the market; this design feature a one piece C-chanel construc-tion that's very rigid and that can be easily bolted down and rotated without having to drill new holes in the work bench.Shaft rest height is 350 mm (13”3/4) and reach 250 mm (10”)

QR CODE

▲Rotates 15 degrees left or right



▲Slidable shaft rest fore and aft



▲Non scratch shaft rest.

130631-SK21

Shaft rests for 1306xx Shaft and Ferrule prepping centers

QR CODE

How to Use the Protective tape

Cut the stripof material length wise right down the middle.

Peel off the backing tape and apply the strip. Apply pressure after positioning.

The soft felt pads can be applied to all of the Golfmechanix turning arms.

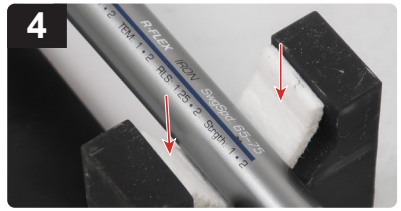

Soft and smooth surface will not damage the shaft