GOLF MECHANIX®

HDi HEAVY DUTY INDUSTRIAL 130900

Now offered with Single shot ferrule insertion capability!

QR CODE

Pneumatic Ferrule Installer

We've designed this pneumatic ferrule installer for batch-processing shafts trimmed to the same length to improve.

the precision and consistency of this critical production step.The ferrule installer can also be operated as a "single shot" ferrule insertion mode by re-positioning the shaft vise from sliding to holding. This makes the process inherently safe and effortless one for the operator.

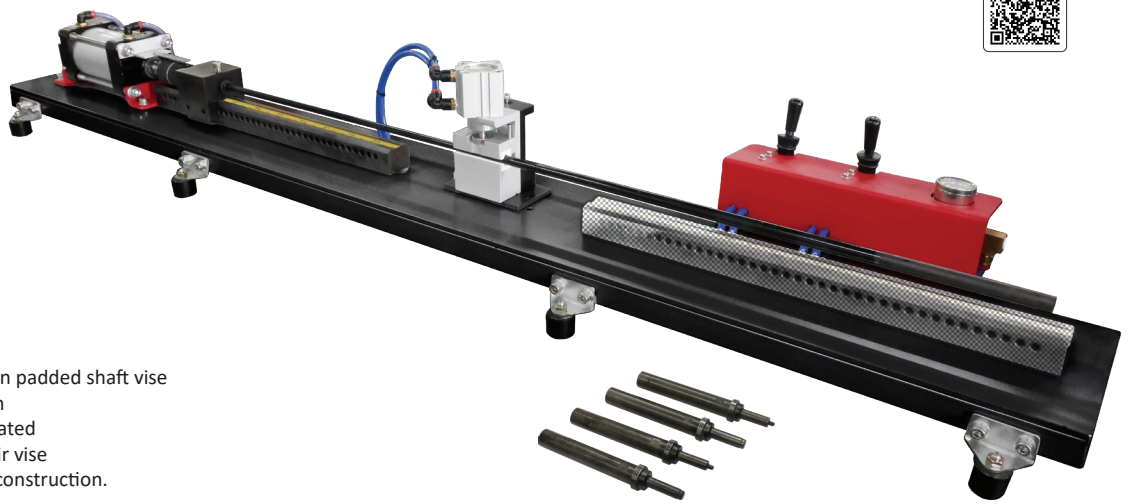

Key Features:

-Inserts ferrules on steel and graphite shafts.
-Adjustable ferrule insertion depth up to 3" deep
-Non marring spring loaded and calibrated nipples
-No Pinch hand free ferrule insertion step
-Batch mode adjusts to any shaft length in 1/2" step
-No setup, single shot mode for multiple shaft lengths
-Non marring Teflon padded shaft vise
-Joy stick operation
-Air pressure regulated
-Heavy duty 70N air vise
-Heavy duty Steel construction.

Slide a ferrule over the plunger

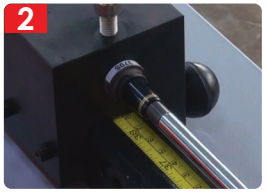

Actuate to drive shaft forward

Shaft centres onto the plunger

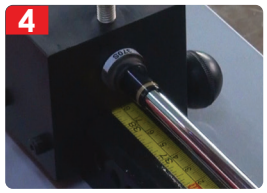

Plunger collapses threading the ferrule to a stop

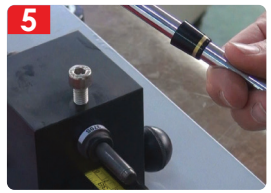

Job done. No fingers pinched and no blunted ferrules either!

Optional

H0801-07

1/4" NPTM Asian Hi-Flo

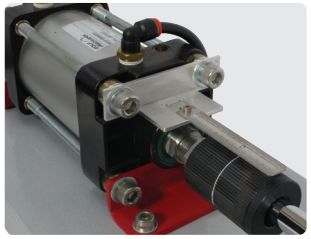
▲Heavy duty pneumatic cylinder delivers 300 Lbs of thrust at 30 PSI. Note the millimetric stroke length adjustment

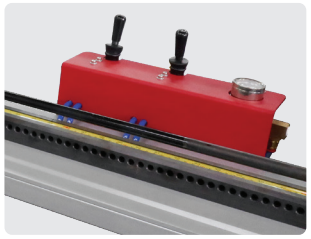
▲Ferrule setter slides on track with 1/2" Step shaft span locator, takes shafts from 30~46 inches long

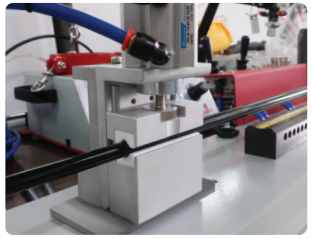
▲Pneumatic shaft restricter, protects against shaft spring back

▲Controls feature Pneumatic joystick actuators, air regulator, pressure indicator

▲Woods & irons ferrule plunger set comprises 2 plungers for graphite shafts and two plungers for steel shafts.